

PTA 102D



FEATURE

- 4 Digit LED display
- current 4~20mA
- Voltage 1~5V
- Auto Zero(자동영점기능)
- RS485 Modbus RTU
- Size 외경 73,8Ø
- 2SPDT Switch

SPECIFICATIONS

FEATURE

- Overload Pressure(최대압력) : Rated Range x 2
- Media Compatibility(사용유체) : Air, non-corrosive gas
- Pressure Range(사용압력) : 0~50Pascal to 0,2MPascal
- 0~±50Pascal to ±0,1MPascal

ELECTRICAL

- Power supply(전원공급) : 24VDC or 85~265VAC
- Connection of Wire(결선) : 2 screw terminal block
- Display(표시유형) : 4Digit LED


PERFORMANCE AT 23°C

- Accuracy(정밀도) : ±0,25% FSO(Includes Linearity, Hysterisis & Repeatability)
- Operation Temperature(사용온도) : -20~85°C
- Compensated Temperature(보정온도) : 0~60°C

MECHANICAL

- Pressure connections(압력연결) : 3/16" Nipple
- Materials(외부재질) : PCABS mold resin
- Weight(중량) : 160g

Dimension >>>>

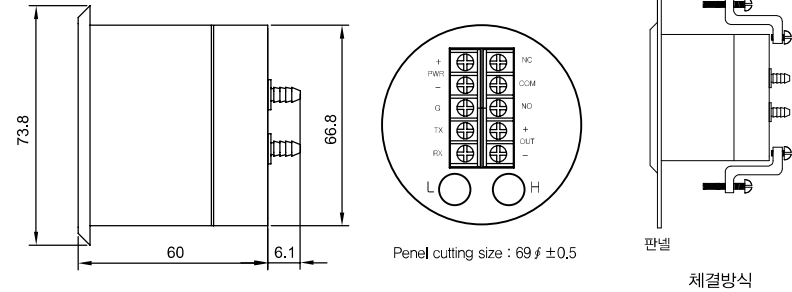

SPECIFICATIONS

TRANSMITTER(Optional)

- Connection of Wier(결선) : 2 screw terminal block
- Output Signal(출력진류) : 4~20mADC(limited at 30mADC)
- Loop Resistance(폐회로저항) : 0~1100ohm

STANDARD ACCESSORIES

- Panel bracket & Bolts

SWITCH(Optional)


- Relay Contact(릴레이출력) : 2SPDT(NC-COM-NO)
- Contact Rating(접점용량) : 1A 30VDC
- Connection of Wier(결선) : 3Screw terminal block
- Level setting(설정유형) : Local setting

COMMUNICATION(Optional)

- RS485 Modbus RTU

Ordering Information

PTA102D (Model)

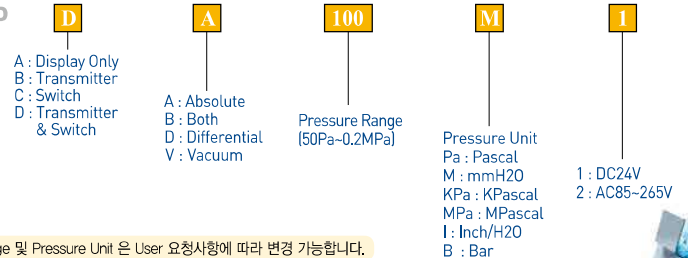

※ Pressure Range 및 Pressure Unit 은 User 요청사항에 따라 변경 가능합니다.

※ Pressure Range & Unit available on Request