


# PTA 106D



## Dimension >>>>

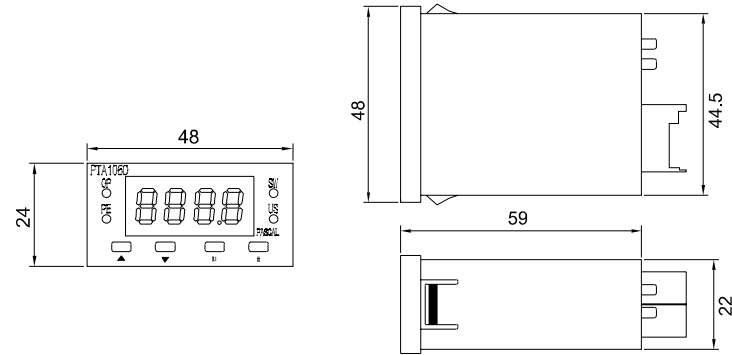

Panel cutting size : 23×45(±0,5)

## FEATURE

- 4 Digit LED display
- current 4~20mA
- Voltage 1~5V
- switch output
- RS485 Modbus RTU
- Size 24×48

## SPECIFICATIONS

### FEATURE

- Maximun Pressure(최대압력) : Rated Range x 2
- Media Compatibility(사용유체) : Air, non-corrosive gas
- Pressure Range(압력범위) : 0~50Pascal to 2500Pascal

### ELECTRICAL

- Power supply(전원공급) : DC24V
- Connections(결선) : 2 Mini plug wiring
- Display(표시유형) : 4 Digit LED

### MECHANICAL

- Pressure Connections(압력연결) : 4Ø TUBE
- Materials(외부재질) : PCABS mold resin
- Weight(중량) : 80g

### PERFORMANCE AT 23°C

- Zero Output(영점출력) : 4mA
- Full Span Output(최대출력) : 20mA
- Accuracy(정밀도) : +/-0,25FSO (Includes Linearity, Hysteresis & Repeatability)
- Operating Temperature(사용온도) : -20~85°C

### TRANSMITTER


- Output Signal(출력전류) : 4~20mA ADC(limited at 40mADC)
- Connections(결선) : 2 wiring
- Loop Resistance(폐회로저항) : 0~1100ohm

### SWITCH

- Relay Contact(릴레이출력) : 1SPDT (NC-COM-NO)
- Contact Rating(접점용량) : 1A 30VD
- Connections(결선) : 3 wiring
- Level Setting(설정) : Local Setting

## Ordering Information

### PTA106D (Model)

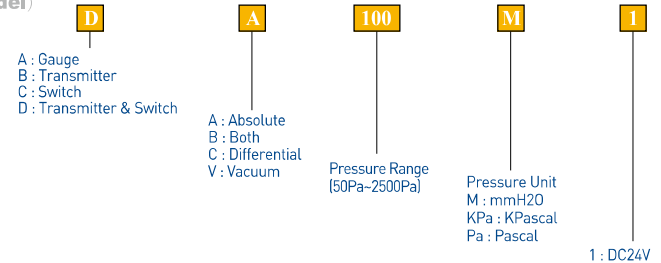

※ Pressure Range 및 Pressure Unit 은 User 요청사항에 따라 변경 가능합니다.

※ Pressure Range & Unit available on Request

