

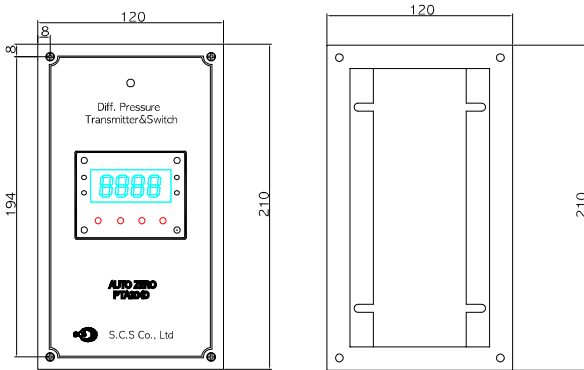


PTA 204D-Type

RTH 204




벽면부착형

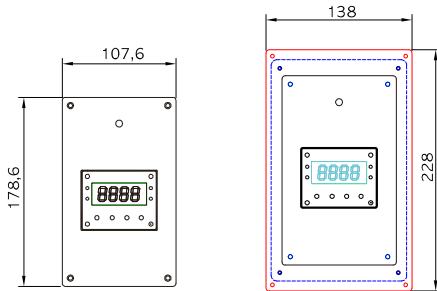

매립형 케이스


외형치수

온 . 습도 센서(Temp & Humidity Sensor)

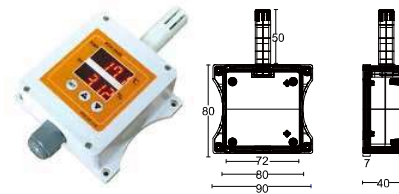


Room Type display

- 온도범위 : $-20^{\circ}\text{C} \sim 80^{\circ}\text{C} \pm 1^{\circ}\text{C}$
- 습도범위 : $10\% \sim 90\% \pm 3\%$
- 입력전원 : DC 8~24V
- 센서출력 : $4 \sim 20\text{mA}$, $1 \sim 5\text{V}$ or RS485
- 표시방법 : FND 4Digit
- 설정방법 : 전면 3key
- 동작온도 : $-25 \sim 80^{\circ}\text{C}$
- 동작습도 : $0 \sim 95\%$

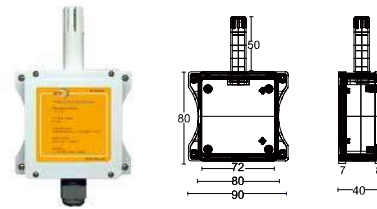

Room Type 일반

- 온도범위 : $-20^{\circ}\text{C} \sim 80^{\circ}\text{C} \pm 1^{\circ}\text{C}$
- 습도범위 : $10\% \sim 90\% \pm 3\%$
- 입력전원 : DC 8~24V
- 센서출력 : RS485
- 동작온도 : $-25 \sim 80^{\circ}\text{C}$
- 동작습도 : $0 \sim 95\%$



Duct Type display

- 온도범위 : $-20^{\circ}\text{C} \sim 80^{\circ}\text{C} \pm 1^{\circ}\text{C}$
- 습도범위 : $10\% \sim 90\% \pm 3\%$
- 입력전원 : DC 8~24V
- 센서출력 : $4 \sim 20\text{mA}$, $1 \sim 5\text{V}$ or RS485
- 표시방법 : FND 4Digit
- 설정방법 : 전면 3key
- 동작온도 : $-25 \sim 80^{\circ}\text{C}$
- 동작습도 : $0 \sim 95\%$

